

BSS 2RS

Insert Bearings in Stainless Steel Pillow Block in Plastic





Technical characteristics:

- Bearing material: tempered stainless steel (magnetic)
- Standard Radial Clearance
- Stainless Steel seals type 2RS
- Greasing: the bearings are supplied greased
- Housing in Plastic


Fields of application:

- Air conveyors for food processing plants
- Construction industry, windows, sliding windows, etc.

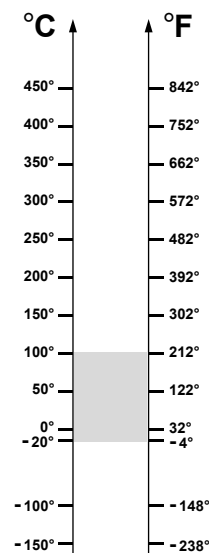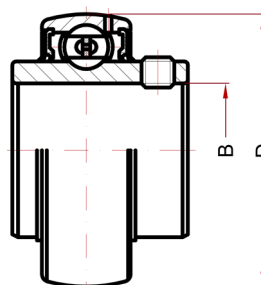

UC SERIE

Designation	Bore (B)	Diam (D)	Speed RPM	Static Load, kN at 100°C	Static Load, kN at 20°C	F Serie	Pillow Blocks suitable FL Serie	Housing codes P Serie
UC 201 BSS 2RS	12	47	1440	5,94	5,94	PLASTIC HOUSING F PL 204	PLASTIC HOUSING FL PL 204	PLASTIC HOUSING P PL 204
UC 202 BSS 2RS	15	47	1440	5,94	5,94	PLASTIC HOUSING F PL 204	PLASTIC HOUSING FL PL 204	PLASTIC HOUSING P PL 204
UC 203 BSS 2RS	17	47	1440	5,94	5,94	PLASTIC HOUSING F PL 204	PLASTIC HOUSING FL PL 204	PLASTIC HOUSING P PL 204
UC 204 BSS 2RS	20	47	1200	5,94	5,94	PLASTIC HOUSING F PL 204	PLASTIC HOUSING FL PL 204	PLASTIC HOUSING P PL 204
UC 205 BSS 2RS	25	52	1120	7,00	7,00	PLASTIC HOUSING F PL 205	PLASTIC HOUSING FL PL 205	PLASTIC HOUSING P PL 205
UC 206 BSS 2RS	30	62	880	10,1	10,1	PLASTIC HOUSING F PL 206	PLASTIC HOUSING FL PL 206	PLASTIC HOUSING P PL 206
UC 207 BSS 2RS	35	72	760	13,6	13,6	PLASTIC HOUSING F PL 207	PLASTIC HOUSING FL PL 207	PLASTIC HOUSING P PL 207
UC 208 BSS 2RS	40	80	680	16,3	16,3	PLASTIC HOUSING F PL 208	PLASTIC HOUSING FL PL 208	PLASTIC HOUSING P PL 208
UC 209 BSS 2RS	45	85	640	18,5	18,5	PLASTIC HOUSING F PL 209	PLASTIC HOUSING FL PL 209	PLASTIC HOUSING P PL 209
UC 210 BSS 2RS	50	90	600	20,8	20,8	PLASTIC HOUSING F PL 210	PLASTIC HOUSING FL PL 210	PLASTIC HOUSING P PL 210
UC 211 BSS 2RS	55	100	536	26,1	26,1	PLASTIC HOUSING F PL 211	PLASTIC HOUSING FL PL 211	PLASTIC HOUSING P PL 211
UC 212 BSS 2RS	60	110	480	29,3	29,3	PLASTIC HOUSING F PL 212	PLASTIC HOUSING FL PL 212	PLASTIC HOUSING P PL 212

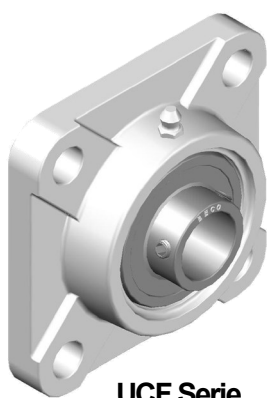

UCF Serie



UCFL Serie



UCP Serie

BECCO

12100 Cuneo - Italy
Via Volta, 7
phone: 0039 0171 66883
fax: 0039 0171 648913
www.becoitalia.it